


1.25" CORRUGATED

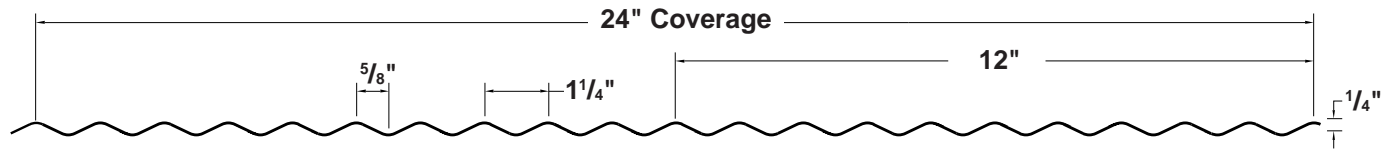

RESIDENTIAL
PANEL

DIRECT
FASTEN
(EXPOSED)


24"
COVERAGE

MINIMUM
3:12 SLOPE

OPEN FRAMING OR
SOLID SUBSTRATE

PANEL OVERVIEW

- ▶ Finishes: Bare Galvanized, MS Colorfast45[®], and Acrylic Coated Galvalume[®]
- ▶ Gauge: 26ga standard
- ▶ 24" panel coverage, 1/4" rib height
- ▶ Applies over open framing or solid substrate
- ▶ 3:12 slope minimum

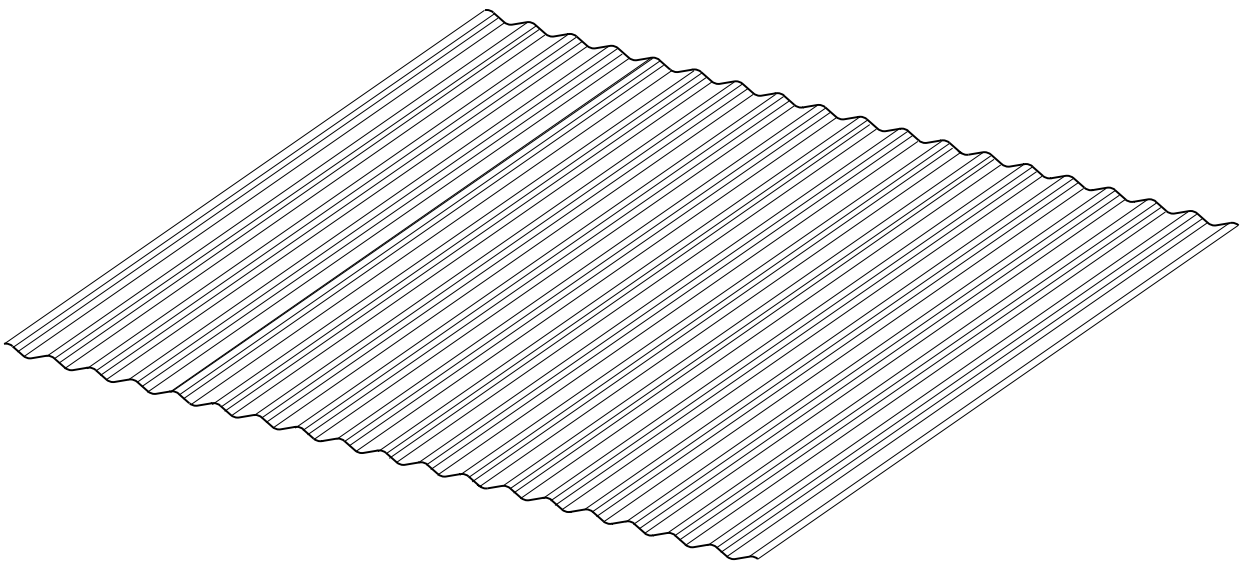


metal sales
manufacturing corporation




1.25" CORRUGATED

ATTACHMENT DETAIL

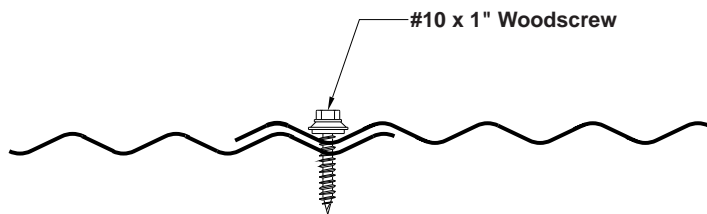


FASTENING PATTERN

Typical Screw Fastening Pattern



Typical Nail Fastening Pattern



GENERAL INFORMATION

► Slope

The minimum recommended slope for corrugated roofing panel is 3:12.

► Substructure

1.25" Corrugated panel is designed to be utilized over open structural framing, but can easily be used with a solid substrate. To avoid panel distortion, use a properly aligned and uniform substructure.

► Coverage

1.25" Corrugated panels are available in a 1/4" rib height with a coverage width of 24"

► Length

Minimum factory cut length is 3'-0". Maximum recommended panel length is 30'-0". Longer panels require additional consideration in packaging, shipping, and erection. Please consult Metal Sales for recommendations.

► Fasteners

The fastener selection guide should be consulted for choosing the proper fastener for specific applications. Quantity and type of fastener must meet necessary loading and code requirements. For applications involving the use of nails instead of screws, Metal Sales recommends nailing through the high part of the corrugation.

NOTE: All panels are subject to surface distortion due to improperly applied fasteners. Overdriven fasteners will cause stress and induce oil canning across the face of the panel at or near the point of attachment.

► Availability

Finishes: MS Colorfast45®, Acrylic Coated Galvalume®, and Bare Galvanized;

Gauge: 26ga standard

(See Metal Sales Product Color Charts for selection.)

SECTION PROPERTIES

ALLOWABLE UNIFORM LIVE LOADS PSF (3 or More Equal Spans)

Ga.	Width (in.)	Yield KSI	Weight PSF	Top in Compression		Bottom in Compression		Inward (Gravity / Deflection) Load					Outward Uplift (Stress) Load						
				Ixx In ⁴ /ft	Sxx In ³ /ft	Ixx In ⁴ /ft	Sxx In ³ /ft	2'	2.5'	3'	3.5'	4'	5'	2'	2.5'	3'	3.5'	4'	5'
26	24"	50	0.86	0.0060	0.0237	0.0060	0.0237	98	50	29	18	12	6	148	96	67	49	38	24

- Theoretical section properties have been calculated per AISI 2001 "Specification for the Design of Cold-formed Steel Structural Members." Ixx and Sxx are effective section properties for deflection and bending.
- Allowable load is calculated in accordance with AISI 2001 specifications considering bending, shear, combined bending and shear, deflection, and applicable testing when available. Allowable load considers the worst case of 3 and 4 equal span conditions. Allowable load does not address web crippling or fasteners/support connection and panel weight is not considered.
- Deflection consideration is limited by a maximum deflection ratio of L/180 of span.
- Allowable loads do not include a 1/3 stress increase in uplift.

metal sales
manufacturing corporation



Kent, WA (800) 431-3470
 Temple, TX (800) 543-4415
 Longmont, CO (800) 289-7663
 Antioch, TN (800) 251-8508
 Woodland, CA (800) 759-6019
 Rogers, MN (800) 328-9316
 Spokane, WA (800) 572-6565

Jefferson, OH (800) 321-5833
 Rock Island, IL (800) 747-1206
 Sellersburg, IN (800) 999-7777
 Jacksonville, FL (800) 394-4419
 Orwigsburg, PA (800) 544-2577
 Independence, MO (800) 747-0012
 Fontana, CA (800) 782-7953

Anchorage, AK (866) 640-7663
 Bay City, MI (888) 777-7640
 Detroit Lakes, MN (888) 594-1394
 Mocksville, NC (800) 228-6119